


P.F. MARKEY, INC.

2880 Universal Dr. • Saginaw, MI
(517) 793-0900 • Fax (517) 793-9511

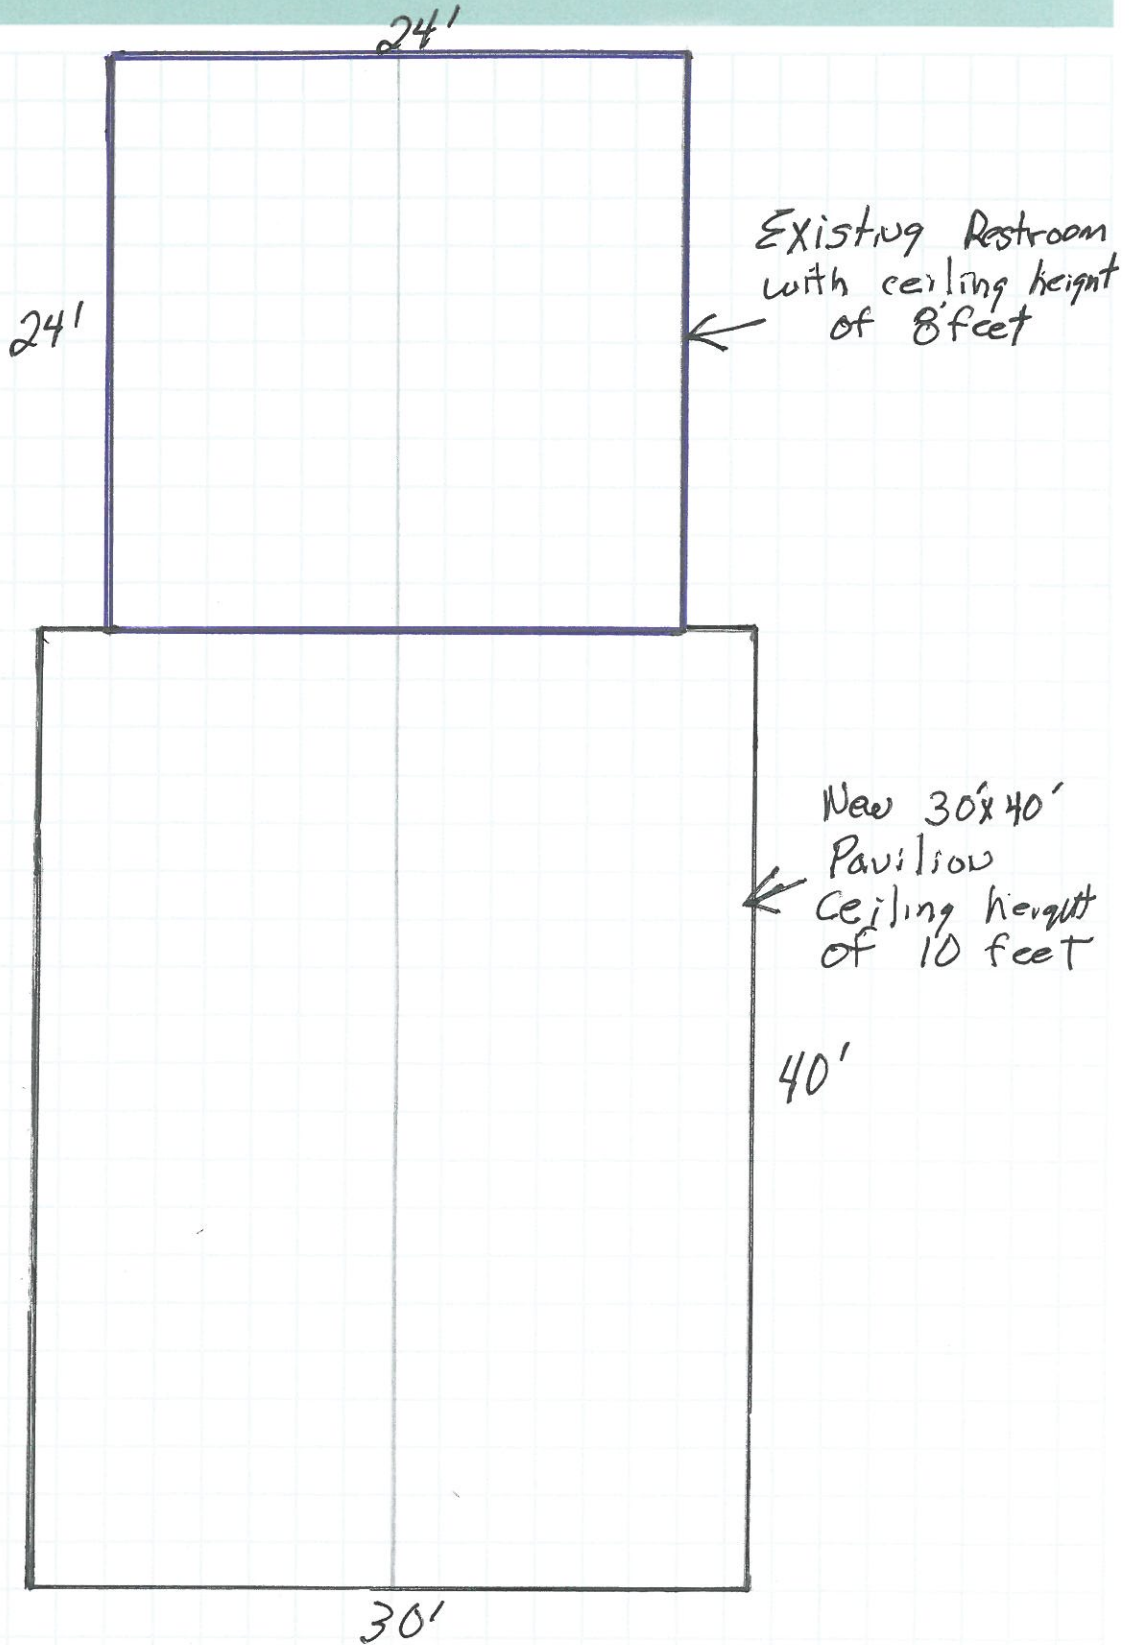

30' x 40' pole barn style Pavilion with 10' ceiling height.

Price Materials and Labor to construct:

14' 6 x 6 poles on eave side 4' in ground

Trusses 30' long with 2' overhangs all around 4/12 pitch

Shingle roofing over 7/16 OSB roof sheathing

Vented Soffit

Ridge Vents

Metal Fascia all around

Please include all structural dimensional lumber with adequate bracing to Boca Code requirements.

Attached to existing 24' x 24' bathroom structure and flash.

Price Materials and labor to do Excavating:

Remove topsoil

Fill with clean sand and compact

Level area for concrete

Price materials and labor to install concrete:

Final grade

Pour and finish 4" thick concrete with wire reinforcement

Saw cuts and seal with sealer.

All construction to be performed to final architectural drawings to be provided by Lincoln Village.